


Wiring Diagrams for Sockets and Relays (post 1998 caravans)

Socket and Plug Wiring diagrams						
12N Normal socket			12S Supplementary Socket			
1	Left turn indicator	Yellow Wire	1	Reverse light	Yellow wire	
2	Fog	Blue Wire	2	Spare	Blue wire	
3	Earth	White wire	3	Earth	White wire	
4	Right turn indicator	Green wire	4	Power feed and auxiliary battery charging	Green wire	
5	Right side light	Brown wire	5		Spare	Brown wire
6	Brake light	Red wire	6	Fridge	Red wire	
7	Left side light and number plate light	Black wire	7	Earth for pin 6	Black wire	

The terms "right" and "left" are when viewed from the rear of the vehicle

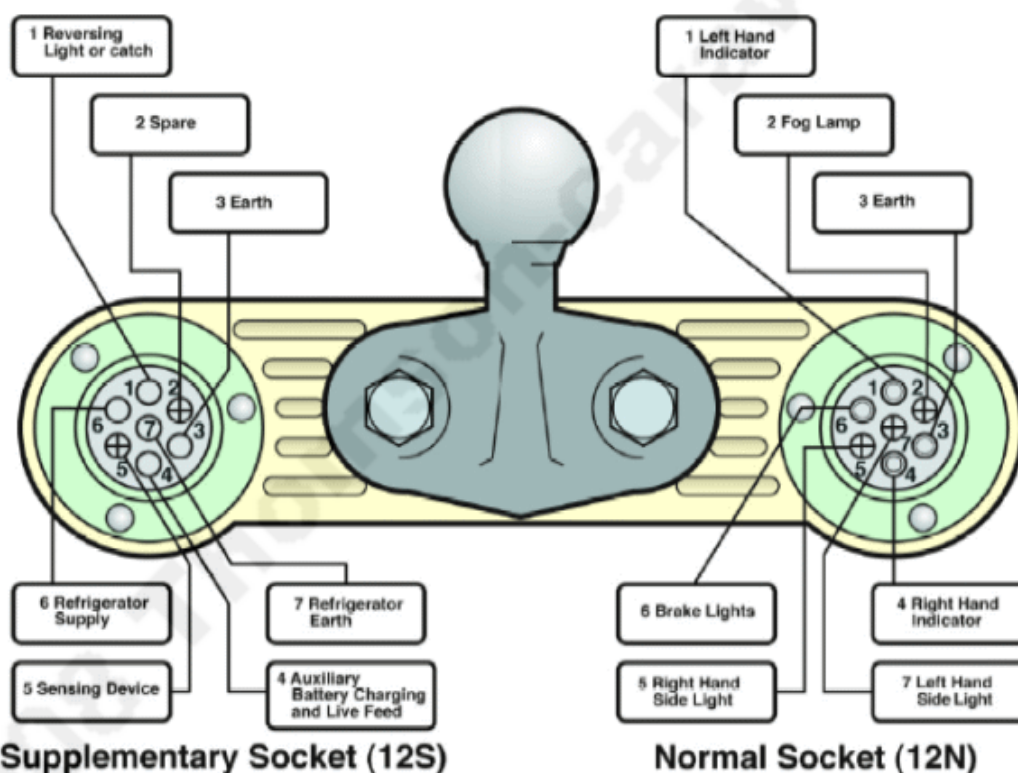

Disclaimer

The information provided on this Website site is offered with no warranty as to the authenticity, suitability or competence of the individual, company or service quoted here in. The Website shall not be liable for any damage or difficulty, direct or indirect, arising from utilisation of the information contained within these pages. Thomson T-Line History & Information is not responsible for the content of external websites.